


BRENTWOOD
Wood Traditional Shutters

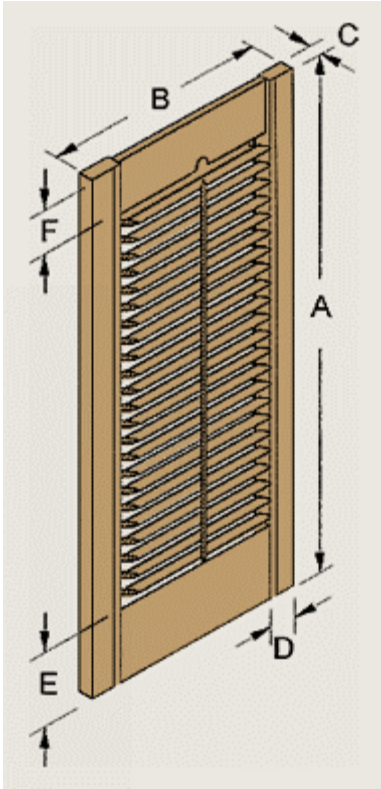

Horizontal Louvers

- A. Height. Divider rail recommended above 40".
- B. Width. Maximum of 18" recommended.
- C. Stile thickness. 3/4" standard. Other thicknesses available.*
- D. Stile width. 1 1/4" standard. Other widths available.*
- E. Bottom rail. 2" to 5 5/8" standard. Other widths available.*
- F. Top Rail. 2" to 4 5/8" standard. Other widths available.*
- G. Divider rail (not shown). 2", 3" or 4" standard.

*See Special Pricing

Vertical Louvers

- A. Height. Divider rail recommended over 30".
- B. Width. Maximum of 24" recommended.
- C. Stile thickness. 3/4" standard. Other thicknesses available.*
- D. Stile width. Range of 1 1/4" to 2" standard. Width of panel determines stile width. Options limited for choice of width.
- E. Bottom rail. 2" to 5" standard. Other widths available.*
- F. Top rail. 2" to 4" standard. Other widths available.*
- G. Divider rail (not shown). 2 1/4", 3 1/4" or 4 1/4" standard.

