



CUBICLE TRACK SYSTEM


TRACK SYSTEMS AT A GLANCE

SERIES	CROSS SECTION	MOUNT	TRACK DRAW	MAX. SET LENGTH	FABRIC WEIGHT	BENDS
 NO. 9046	$\frac{3}{8}'' \times \frac{1}{2}''$	Ceiling Recessed	Two-Way One-Way Multiple	40 ft. 20 ft. 40 ft.	80 lbs. 40 lbs. 80 lbs.	8" or 12" radius or circular curved
 NO. 9600	$\frac{29}{32}'' \times \frac{11}{16}''$	Ceiling Recessed Wall	Two-Way One-Way Multiple	40 ft. 20 ft. 40 ft.	96 lbs. 48 lbs. 96 lbs.	14" approx. radius or circular curved

INSTALLATION AIDS

SUSPENDED CEILING CLIPS


Can be used for mounting Architrac rod sets on suspended type ceilings where conventional surface mounting with screws and/or mounting devices is not possible.

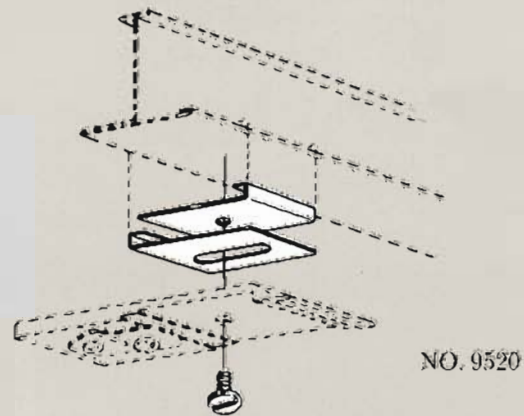

NO. 9520

CHANNEL PROTECTOR







Plastic channel protector should be used as shown. Place inside the track during ceiling or recess mounting of surface track to prevent damage to sliding surface. Use with 94005, 94008 and 9046 tracks.

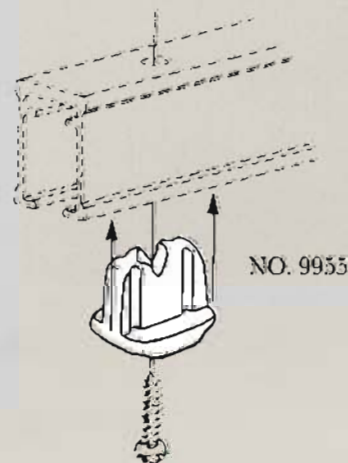

NO. 9955


Do not use Hex head screws.
Must use low profile heads.

POPULAR CONFIGURATIONS FOR INTRAVENOUS OR CUBICAL INSTALLATIONS



CUBICLE TRACK SYSTEM

CUBICLE TRACK SERIES 9046

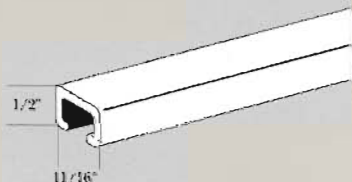

Good quality track for use with cubicle or pinch-pleated curtains. Track is $\frac{3}{8}$ " x $\frac{1}{2}$ " x .070 extruded 6063T5 anodized aluminum. Lubricated with Kirlon for friction-free operation. If specified, tracks will be bent or circular curved from one continuous length up to 16'. Bends will be approx. 8" or 12" radius.

CARRIERS FOR SERIES 9046 TRACK



NO. 9644



NO. 9685




NO. 9686



NO. 9685/061. Self lubricating button slide. Zinc plated .080 wire hook designed for grommeted panels.
 NO. 9686/061. Slide and hook without bead chain.
 NO. 9644/061. Master slide for pinch-pleated panels; permits draperies to overlap for privacy. Use 9406 slide.

OTHER COMPONENTS FOR SERIES 9046 TRACK

Specifications supplied on request.



NO. 9682
End cap





NO. 9684
End stop



NO. 9406 Button
Lubri-slide Molded
Celcon; glides
smoothly in track.

CUBICLE TRACK SYSTEM

CUBICLE TRACK SERIES 9600

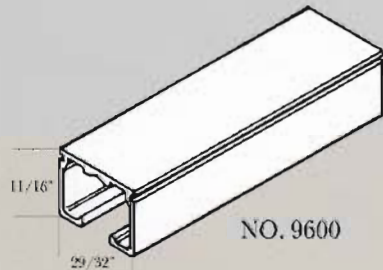


Excellent choice for privacy curtains in hospitals and extended care facilities. Track is $\frac{39}{32}$ " x $\frac{11}{16}$ " x .050 extruded 6063T5, anodized aluminum. Inner surface is center ridge-grooved for easy installation.

If specified, tracks will be bent or circular curved from one continuous length up to 20'. Bends will be approx. 14" radius. Maximum weight per foot: 2.4 pounds.
NO. 9601/090. 33" track with 90° bend.
NO. 9605/090. Track with 90° bend, 9616 carriers, 9610 end stops and 9611 pull-out.


OTHER COMPONENTS FOR SERIES 9600 TRACK

Specifications supplied on request.



NO. 9610
End stop

NO. 9611
Pull-out




NO. 9612
Splicer



NO. 9613
End cap



NO. 9637
Support



NO. 9639
Bracket

CARRIERS FOR SERIES 9600 TRACK



NO. 9616



NO. 9633
Steel eye cubicle

NO. 9616/061. Carrier body and wheels of Celcon. Eye and hook of .093 bright basic wire, nickel plated.

Celcon® is a registered trademark of Ticona®

OTHER COMPONENTS FOR 9600 TRACKS


Specifications supplied on request.



NO. 9623
Ceiling flange



NO. 9620/12
Suspension tubing
3/4" x 3/4"




NO. 9624
Track socket



NO. 9689
16" PVC hanger



NO. 9690
16" hook chain



NO. 9693
End ring for
shortening
chain