









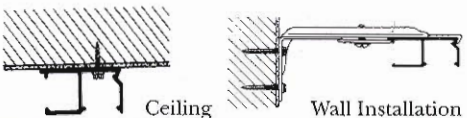

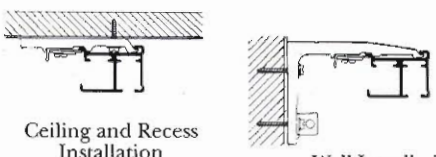

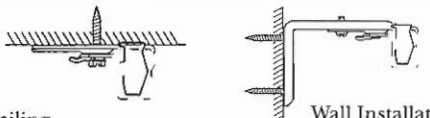
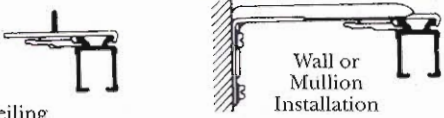






## TRACK SYSTEMS PERFORMANCE DATA

	Series	Cross Section	Max. Track Set Length	Heading Systems
<b>CORD DRAW SYSTEMS</b>  Track set is opened and closed by traverse cord. Continuous cord loop permits use of cord tension pulley.	93001 SERIES		One-Way Draw 16 ft. Two-Way Draw 32 ft. Can be angular bent using 12" radius or circular curved**	Accordia-Fold® *Ripplefold® Conventional Pleated
	93601 SERIES		One-Way Draw 16 ft. Two-Way Draw 32 ft. Cannot be bent or curved	Conventional Pleated
	94001 SERIES		One-Way Draw 16 ft. Two-Way Draw 32 ft. Can be angular bent using 12" radius or circular curved**	Conventional Pleated Accordia-Fold® *Ripplefold®
	9095 SERIES		One-Way Draw 24 ft. Two-Way Draw 32 ft. Can be angular bent using 8" radius or circular curved**	Conventional Pleated
	3000 SERIES (Superfine)		One-Way Draw 12-1/2 ft. Two-Way Draw 25 ft.	Conventional Pleated
<b>HAND DRAW CORDLESS SYSTEMS</b>  Track set is opened and closed by hand – no cord involved. Fiberglass batons, attached to lead carriers, are recommended for traversing draperies.  Maximum track lengths and maximum fabric weight do not apply to curved track – check with customer service for feasibility – send complete specifications and fabric weight.  **NOTE: Nos. 93001, 94001, 94003, 94005 and 9046 can be curved to a larger semi-circle radius. Contact customer service for more information.  *Maximum length for one-way draw Ripplefold® track systems is 16 feet.	94003 SERIES		One-Way Draw 20 ft. Two-Way Draw 40 ft. Can be angular bent using 12" radius or circular curved**	Conventional Pleated Cubicle Curtain Accordia-Fold® Ripplefold®
	94004 SERIES		One-Way Draw 16 ft. Two-Way Draw 32 ft. Cannot be curved	Conventional Pleated Cubicle Curtain Accordia-Fold® Ripplefold®
	94005 SERIES		One-Way Draw 16 ft. Two-Way Draw 32 ft. Can be angular bent using 12" radius or circular curved**	Conventional Pleated Cubicle Curtain Accordia-Fold® Ripplefold®
	9046 SERIES		One-Way Draw 16 ft. Two-Way Draw 20 ft. Can be angular bent using 8" or 12" radius or circular curved**	Conventional Pleated Cubicle Curtain Accordia-Fold® Ripplefold®
	94008 SERIES		One-Way Draw 16 ft. Two-Way Draw 32 ft. Cannot be curved	Pinch Pleats Cubicle Ripplefold® Accordia-Fold®

Application	Intermediate Support Spacing	Bracket Clearance		Max. Fabric Weight			Lbs. per Ft.
		Ceiling	Wall				
 <p>Ceiling      Wall Installation</p>	Track perforated 16" on center for direct mounting with screw. For Wall Mount: Two brackets at each end 24" apart, 48" apart over remainder of track.	No brackets required.	2" - 3"	One-Way Draw Two-Way Draw	½" Pulley 32 lbs. 32 lbs.	¾" Pulley 32 lbs. 64 lbs.	2 lbs. 2 lbs.
 <p>Wall Installation</p>	Two brackets at each end 24" apart, 48" apart over remainder of track.	1-¾" - 3-¼"		One-Way Draw Two-Way Draw	32 lbs. 32 lbs.	3 lbs. 3.5 lbs.	
 <p>Ceiling and Recess Installation      Wall Installation</p>	Two brackets at each end 24" apart, 48" apart over remainder of track.	1-½"	Single 2-¾" - 3-¼" Double 1-½" - 2-½"	One-Way Draw Two-Way Draw	½" Pulley 32 lbs. 32 lbs.	1" Pulley 64 lbs. 80 lbs.	3.1 lbs. 2 lbs.
 <p>Ceiling      Wall Installation</p>	1 support 16" from each end, 32" apart over remainder of track.	No brackets required.	2" - 3" 4" - 5"	One-Way Draw Two-Way Draw	30 lbs. 45 lbs.	1.9 lbs. 1.4 lbs.	
 <p>Ceiling      Wall Installation</p>	Two brackets at each end 24" apart, 48" apart over remainder of track.	Drop-In 2"-3"	Push-In 2"-3"	One-Way Draw Two-Way Draw	15 lbs. 20 lbs.	1 lbs. .8 lbs.	
 <p>Ceiling      Wall or Mullion Installation</p>	Two brackets at each end 24" apart, 48" apart over remainder of track.	2"	3-¾" - 4-¾"	One-Way Draw Two-Way Draw	40 lbs. 80 lbs.	2 lbs. 2 lbs.	
 <p>Ceiling Installation</p>	Track perforated 16" on center for direct mounting with screws.	No brackets required.		One-Way Draw Two-Way Draw	32 lbs. 64 lbs.	2 lbs. 2 lbs.	
 <p>Ceiling Installation</p>	Track perforated 16" on center for direct mounting with screws.	No brackets required.		One-Way Draw Two-Way Draw	32 lbs. 64 lbs.	2 lbs. 2 lbs.	
 <p>Ceiling Installation</p>	Track perforated 16" on center for direct mounting with screws.	No brackets required.		One-Way Draw Two-Way Draw	32 lbs. 64 lbs.	2 lbs. 2 lbs.	
 <p>Ceiling      Wall or Mullion Installation</p>	Track perforated 16" on center for direct mounting with screws. For Wall Mount: Two brackets at each end 24" apart, 48" apart over remainder of track.	3"	3-¾" - 4-¾"	One-Way Draw Two-Way Draw	32 lbs. 64 lbs.	2 lbs. 2 lbs.	

# ARCHITRAC® SERIES 94001 TRACK


## FOR WALL OR CEILING MOUNTING

### Dual-Channel, Cord Operated

#### DESCRIPTION


Extruded .050" NO. 6063T5 aluminum alloy, etched and anodized. White baked enamel finish. Two end pulleys to choose from for either lightweight or heavyweight draperies. Multiwheel roller-bearing masters prevent any binding and give easy traversing.

ACTUAL  
SIZE  
END-VIEW






#### FEATURES

- Separate channels for operating equipment and carriers which hold draperies.
- Will accommodate Accordia-Fold®, Ripplefold® and standard pleated draperies.
- Remove and add slides with snap open end gate.

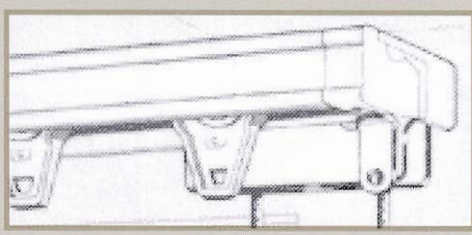


#### APPLICATIONS

Mounts on wall or ceiling (flush or recess). For spans up to 40' in a two-way draw. Track can be curved. This track series will accommodate Accordia-Fold®, Ripplefold®, and conventional pleated drapery heading systems.

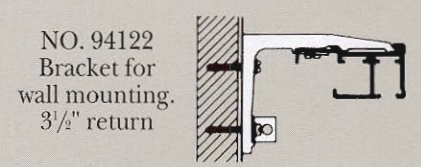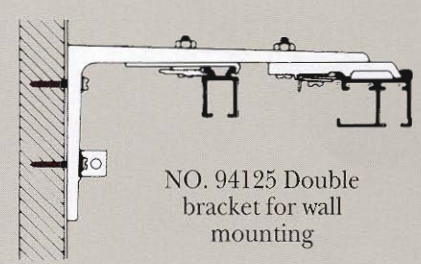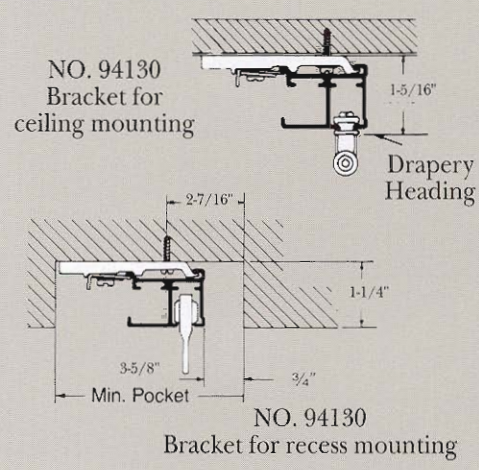


#### COMPONENT PARTS

##### Choice of Pulley Sets




NOS. 94119 and 94120 1/2" diameter Teflon® bearings for standard weight draperies where minimum stackback and uniform folding to the end of the rod is desired.





NOS. 94101 and 94102 1" diameter heavy duty ball bearing pulley sets for heavier installations, larger spans. **Requires use of rod notching tool NO. 9997**

#### CONVENTIONAL HEADING SYSTEMS

Masters for Conventional Pleated Draperies

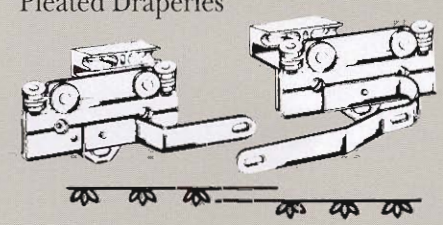



NOS. 94104 and 94103 Multiwheel roller-bearing masters. Regardless of torque, master rollers won't bind.



Teflon® is a registered trademark of DuPont®.

### OPTIONAL OPERATIONAL COMPONENTS

Choice of masters for Accordia-Fold®, Ripplefold® heading systems.

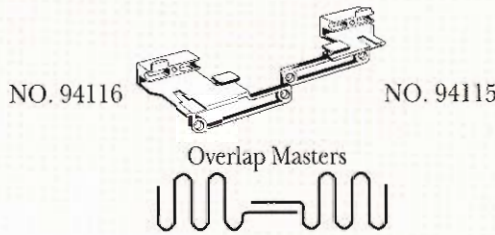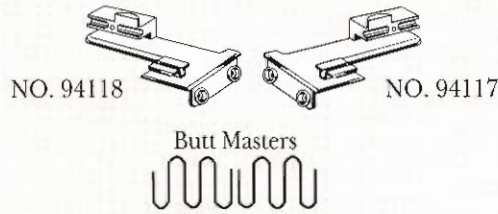

2. Specify Mounting Brackets and Quantity

- A. Ceiling
- B. Wall – Single Track
- C. Wall – Double Track

3. Specify Drapery System and Fullness

- A. Standard Pleated
- B. Ripplefold® 120%, 100%, 80%, 60%
- C. Accordia-Fold®

4. Specify Master

- A. Butt-Master
- B. Overlap Master

5. End Pulley Options

- A. 1/4" Teflon Bearing – NOS. 94119 and 94120
- B. 1" H.D. Ball Bearing – NOS. 94101 and 94102

6. NO. 9934 polyester cord, (NO. 4 size) used with 1/2" Teflon® end and 1" ball bearing end pulley set.

7. Tension Pulley to be NO. 9923

### SUGGESTED SPECIFICATIONS

1. Furnish and install, as indicated on plans, Kirsch Track NO. 94001, extruded of .050" 6063T5 aluminum alloy in accordance with Aluminum Association Specification. NO. AA-C22A21. (25) White, Baked Enamel

Drapery panels butt together at center.  
No flat areas or overlap shadow.

### ASSEMBLED SETS

Set includes assembled rod, 94122 wall or 94130 ceiling brackets and 9923 cord tension pulley; longer brackets can be ordered separately. Rod may be angular bent or circular curved.

	NO.	Finish	Description
	94270H	25	Set with 1" end pulley
	94270	25	Set with 1/2" end pulley

Brackets: Wall or ceiling mount.

Draperies: Pinch Pleat, Accordia-Fold® (butt or overlap masters), or Ripplefold® (butt or overlap masters and fullness).

Fabrication and Planning Guides:  
Accordia-Fold®, Refer to R5120002  
Ripplefold®-Tape, Refer to R4730002

### TRACK SPECIFICATIONS:

NO.	Headings	Mount	Description	Max Track Set Length		Max Fabric Weight	
				1/2" Pulley	1" Pulley	1/2" Pulley	1" Pulley
94001	Pinch Pleat *Ripplefold Accordia-Fold	Ceiling Wall Recessed	Can be angular bent using 12" radius or circular curved One-Way Draw Two-Way Draw	16 ft. 32 ft.	20 ft. 40 ft.	32 lb. 32 lb.	64 lb. 80 lb.


\* Maximum length of one-way draw is 16 feet.

## ARCHITRAC® II SERIES 93001 TRACK

### FOR CEILING OR WALL MOUNTING Dual-Channel, Cord Operated

#### DESCRIPTION

Extruded .050" NO. 6063T5 aluminum alloy, etched and anodized. Finish is white. Two end pulleys to choose from for either lightweight or heavyweight draperies.

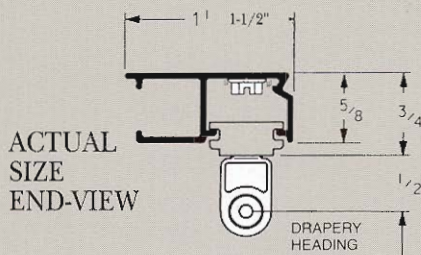


#### FEATURES

- Front loading carrier system for easy hanging of draperies.
- Large opening carrier channel accepts standard hex socket drivers for direct ceiling installation.

- Available with either 3/4" or 1/2" end pulley sets.
- Choice of butt or overlap masters.
- Sliding edges coated with Kirlon® for smooth traversing action.

#### APPLICATIONS

Mounts on wall or ceiling. Track can be curved to any angle using a 12" radius or circular curve. Can be used in two-way draw for spans up to 32'. Will accommodate Accordia-Fold®, Ripplefold®, and pinch pleated draperies.

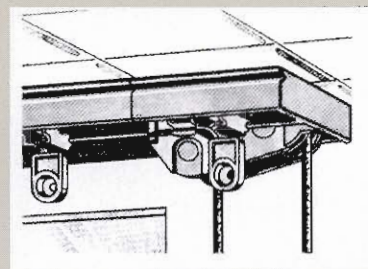

#### CEILING INSTALLATIONS

Install directly through pre-drilled holes (16" intervals) in track and end pulleys. Use fasteners which yield direct withdrawal strength of 25 lbs.

#### WALL INSTALLATIONS

Two brackets at each end of track 24" apart, 48" apart over remainder of track.

#### COMPONENT PARTS

NO. 93107 L.H.  
Overlap Master

NO. 93106 R.H.  
Overlap Master

NO. 93105 L.H.  
Butt Master

NO. 93104 R.H.  
Butt Master

NO. 93103  
One-Way draw  
end pulley

NOS. 93091 & 93092  
L.H and R.H.  
Heavy-duty 3/4" dia.  
Teflon® bearings;  
max. Load 64 lbs.

NOS. 93101 & 93102  
L.H and R.H.  
1/2" dia. end pulleys;  
max. Load 32 lbs.

NO. 93140-93143  
Space slide shoes for  
Ripplefold systems

NO. 93138  
Ceiling Bracket

NO. 93139  
Wall Bracket  
2" to 3" clear

NO. 93123  
Slide Shoe

NO. 93121  
Snap Carrier

### SUGGESTED SPECIFICATIONS

1. Furnish and install, as indicated on plans, Kirsch Track NO. 93001, extruded of .050" 6063T5 aluminum alloy in accordance with Aluminum Association Specification NO. AA-C22A21. Finish to be (25) white, baked enamel
2. Specify Mount
  - A. Surface direct or NO. 93138 ceiling brackets
  - B. Wall - NO. 93139 brackets
3. Specify Drapery System and Fullness
  - A. Accordia-Fold® or conventional pleated.
  - B. Ripplefold® - 120%, 100%, 80%, 60%
4. Specify Master Slides
  - A. Butt-Masters, NOS. 93104 and 93105
  - B. Overlap Masters NOS. 93106 and 93107

5. End Pulley Options
  - A. Regular, NOS. 93102
  - B. Heavy Duty, NOS. 93091 and 93092

6. Cord to be NO. 9934 polyester.

7. Cord Guide to be NOS. 9945 or 9923 tension pulley.
- MAXIMUM CAPACITY SPECIFICATIONS FOR H.D. ARCHITRAC (Series 93001)

Maximum widths are determined in part by available track lengths. Splicing is not recommended.

Maximum loads apply when using Kirsch Ripplefold® and Accordia-Fold® drapery systems. NO. 93001, when installed with medium weight fabric on standard size windows (i.e., 16' wide by 8' high) will operate with a 2-3 lb. pull requirement. When installed with a maximum load, it will operate with a 5-6 lb. pull requirement.

Figures at right may be used to determine maximum loads, depending on type of fabric.


NOTE: All components have been tested under conditions simulating ten years' usage. Snaps will detach with a 4 lb. "peel" action and release with a sheer pull of 22 lbs.

Type of fabric based on 48" goods - 5 oz. per lineal yard unlined sheer or lightweight fabrics. Size of draperies to equal 32 lbs. based on 100% fullness 16' wide x 32' long - 32' wide x 16' long

Type of fabric based on 48" goods - 10 oz. per lineal yard. Lined sheers or lightweight fabrics. Size of draperies to equal 32 lbs. based on 100% fullness 16' wide x 16' long - 32' wide x 8' long


Type of fabric based on 48" goods - 20 oz. per lineal yard. Lined medium weight fabrics or heavy cotton, velours and linens. Size of draperies to equal 32 lbs. based on 100% fullness 16' wide x 8' long

### ARCHITRAC® SERIES 93001 TRACK

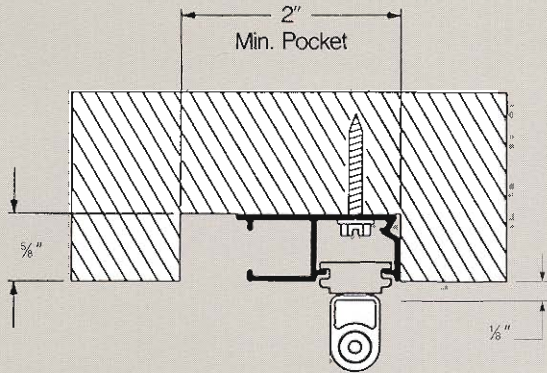

#### ASSEMBLED SETS

Set includes assembled rod, standard wall or ceiling brackets and 9923 cord tension pulley. Longer brackets must be ordered separately. Rod may be angular bent or circular curved.

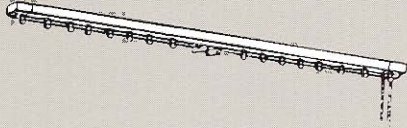	NO.	Finish	Description
	93150H	25	Track with heavy-duty pulleys
	93150	25	Track with standard pulleys

Fabrication and Planning Guides:  
 Accordia-Fold®, Refer to R5120002  
 Ripplefold®, Refer to R4730002

#### TRACK SPECIFICATIONS

NO.	Headings	Mount	Description	Max Track Set Length	Max Fabric Weight	
93001	Pinch Pleat Ripplefold® Accordia-Fold®	Ceiling Wall Recessed	Can be angular bend using 12' radius or circular curved One-Way Draw Two-Way Draw	16 ft. 32 ft.	1/2" Pulley 32 lb. 32 lb.	3/4" Pulley 32 lb. 64 lb.


# DOUBLE DUTY RODDING SERIES 9095 TRACK

**FOR WALL OR CEILING MOUNTING. USE WITH CONVENTIONAL DRAPERIES ONLY**

**Single Channel, Cord Operation DESCRIPTION**

22 gauge steel (.030"), white baked enamel finish. An extra strong and rugged deluxe traverse line. Push-in style brackets for fast mounting. Flange construction provides extra strength; makes surface mounting easy. Cords are completely concealed in track.

ACTUAL SIZE  
END-VIEW



**APPLICATION**


Surface or recess mounting. Holes pre-drilled in integral mounting flange on 16" centers for direct mount with Hex or Pan Head screws. No supports or brackets required for ceiling mounting.

**FEATURES**


- Can be curved to 8" radius.
- Ball bearing pulleys.
- Self-lubricating slides.
- Concealed cord, can't sag.
- Baked enamel finish.



**CEILING MOUNT**



**COMPONENT PARTS**



NO. 9095 rodding 12', 16', and lengths. Can be curved.


NO. 3909 Slide Carrier Molded; self-lubricating. Molded of special formula; self-lubricating.

PUSH-IN END BRACKETS

NO.	Clearance
3311	1" to 2"
3312	2" to 3"


**WALL OR CEILING MOUNTING.**

Use choice of bracket/support projections.



Track is perforated through flange; 16" on center. No brackets or supports needed. Use the same components for wall or ceiling mounts.

**MORE COMPONENT PARTS**



NO. 9287N Ball Bearing pulley sets. Easy operation at unusually wide or high spans or with heavy panels.



NO. 9934 Cord size 4, braided cord; polyester core.

NO.	Clearance
9592	2" to 3"

NO. 9497 Master Slides One-Piece construction permits free overlap of draperies when closed



**ASSEMBLED SETS**

Double Duty is available in two-way, one-way and multiple draw sets. Also in double traverse rod sets and special ceiling track sets.

**MAXIMUM CAPACITY**

Max. Rod Length	Max. Fabric Weight
One-Way - 24'	30 lbs.
Two-Way - 32'	45 lbs.

**Support Spacing**

One support 16" from each end bracket and one each 32" over remainder of rod (1 support at splice).

**SUGGESTED SPECIFICATIONS**


1. Furnish and install, as indicated on plans, Kirsch track NO. 9095, formed of .030" 22 gauge steel with baked enamel finish inside and out. To be used with Kirsch components.
2. End pulley Sets to be push-in style with ball bearings, NO. 9287.
3. End brackets to be push-in style. All supports to be fastened with appropriate fastening devices to provide 25 lbs. withdrawal strength per device.
4. Cord to be sized NO. 4, NO. 9934 polyester and rigged for tension pulley.

### BATON OR HAND DRAW


Series 94003 and 94008 Track for wall or ceiling mounting • Series 9046 Track for ceiling mounting (Single Channel, Cordless)

#### DESCRIPTION


Extruded .050" high strength, 6063T5 aluminum alloy single channel tracks etched and anodized in natural finish in accordance with Aluminum Association Specification NO. AA-C22A21. For cordless traverse operation. All sliding edges lubricated with Kirlon® except 94008.

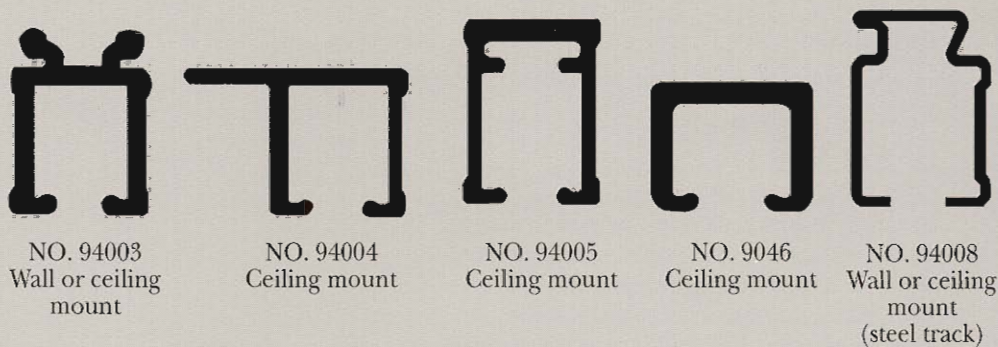


#### APPLICATIONS



NO. 94004  
Ceiling mount



NO. 94005  
Ceiling mount




NO. 9046  
Ceiling mount


NO. 94004, Hand draw, ceiling mount Rear flange perforated on 16" centers for direct ceiling mount; no need to screw through channel. Track cannot be curved. Use NO. 94142 end caps with NO. 9670 ball bearing carriers. White baked enamel finish.

NO. 94005, Hand draw, ceiling mount Track perforated on 16" centers. Use NO. 94141 end cap with NO. 9670 ball bearing carriers. Track can be bent to any angle using a 12" radius; semi-circular curves of 48" radius (min.) can be curved at factory.

NO. 9046 Hand draw, ceiling mount Track perforated on 16" centers. White baked enamel finish. Track can be bent to any angle using 8" or 12" radius; semi-circular curves of 48" radius (min.) can be curved at factory.




NO. 94003 Hand draw, wall or ceiling mount. Use projection bracket NO. 94132, ceiling bracket NO. 94140. Use NO. 94141 end caps with NO. 9670 ball bearing carriers. White baked enamel finish. Can be bent to any angle using 12" radius; larger semi-circular radius curved at factory.



NO. 94008, Hand draw, wall or ceiling mount. Use projection bracket NO. 94132, ceiling bracket NO. 94140. Use NO. 9670 ball bearing carriers. White baked enamel finish. Cannot be bent.


#### OVER THE TOP MASTER CARRIER

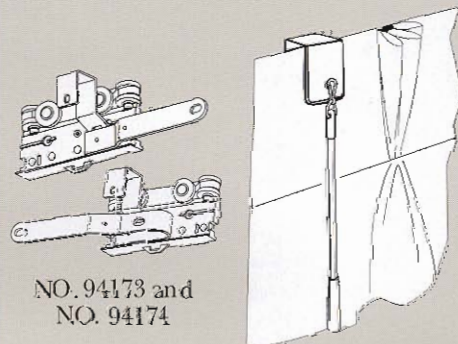

NO. 94173 and  
NO. 94174




**COMPONENT PARTS**



NO. 9670




NO. 9406




NO. 9683



NO. 9684



NO. 94110 Splice  
for 94003 track




NO. 9682 End cap  
for NO. 9046




3-1/2"

NO. 9686 Slide  
carrier with hook,  
without bead chain.  
Standard drop,  
3-1/2". Other drops  
available (using  
chain) at extra cost.

If using NO. 9670 slide carriers, NO. 9644 masters and 9684 end stops must be used. With NO. 9670 carriers, use NO. 9683 stops.




NO. 94141 End  
cap for NOS.  
94003, 94005



NO. 94142 End  
cap for NO. 94004




NO. 9678R




NO. 9685 Slide  
carrier with hook  
NO. 9406 button  
slide with attached  
hook.

NO. 9673 Carrier  
with hook. Ball  
bearing carrier  
with attached  
hook.



NO. 9644 Master slide carriers  
give center overlap for privacy.  
May be used with batons.



NO. 94173 R.H. Master Carriers  
NO. 94174 L.H. Master Carriers




NO. 94158 R.H. Master slide  
NO. 94159 L.H. Master slide  
Overlap masters for batons; Ripplefold®,  
Accordia-Fold®, conventional pleat  
draperies (panels must hang  
below track).

NO. 9687 Ball  
bearing carrier  
with hook, without  
chain. Has eyelets  
for NO. 9688  
chain. Use chain  
with NOS. 94003 -  
94005; cannot use  
with 9046



NO. 9684 End stop  
holds end hooks of  
shower curtains.




NO. 94135 R.H. Master Carriers  
NO. 94136 L.H. Master Carriers

**BATONS WITH  
HARNESS SNAPS**

For use with cordless hand draw;  
white finish


3/8" Fiberglass	1/2" Steel	Length
NO. 91232	91332R	2 - 1/2' long
NO. 91233	91333R	3' long
NO. 91234	91334R	4' long
NO. 91235		5' long
NO. 91236		6' long



NO. 94113 R.H. Master Carriers  
NO. 94114 L.H. Master Carriers  
Overlap masters for NOS. 94003-  
94008 tracks. Multi-wheel to take  
torque in any direction.



NO. 9406 Button  
Lubri-slide Molded  
Celcon; glides  
smoothly in track.



NO. 94133 R.H.  
Master Carriers  
NO. 94134 L.H.  
Master Carriers

Baton Draw Multi-Wheel Masters for  
94133 and 94134 Accordia-Fold® and  
Pinch Pleat for extra overlap. 94135  
and 94136 for Ripplefold®.  
NOTE: Above masters require use of  
94145 or 94146 stiffeners.

## BATON OR HAND DRAW SUGGESTED SPECIFICATIONS

### 94003 SERIES

1. Furnish and install, as indicated on plans, Kirsch track NO. 94003, extruded of .050" 6063T5 Aluminum alloy etched and anodized.
2. Specify Finish: (25) White
3. Specify Slide Carrier: NO. 9670 Ball Bearing style, NO. 9687 Ball Bearing style, NO. 9673 Ball Bearing style, or NO. 9678R Wheeled Style.  
(Specify NO. 9603 End Cap and NO. 94113-94114 Master Carrier with the above)  
Specify Slide Carrier: NO. 9406 Button Style, NO. 9685 Button Style, or NO. 9686 Button Style  
(Specify NO. 9684 End Stop and 9644 Master Carrier with Button Style Slides)
4. Specify Mounting Bracket: NO. 94132 (Wall Mount) V (2"-3" Clearance) or NO. 94140 (Ceiling Mount).  
One Bracket to be mounted at each end of track. (One 24" from each drapery stacking end and one at 48" intervals over remainder of track).

### 94004, AND 94005 SERIES

1. Furnish and install, as indicated on plans, track NO. 94005 or 94004, extruded of .050" 6063T5 Aluminum. Track to be fastened securely at 16" intervals through Pre-Drilled holes.
2. Specify Finish for 94004: (25) White (NO. 94004 ONLY)
3. Specify Slide Carrier: NO. 9670 Ball Bearing style, NO. 9687 Ball Bearing Style, NO. 9673 Ball Bearing style, or NO. 9678R Wheeled Style.  
(Specify NO. 94142 End Cap for NO. 94004 Track Series. Specify NO. 94141 End Cap for 94005 Track Series. Specify NO. 94113 and 94114 Master Carriers with Ball Bearing style).  
Specify Slide Carrier: NO. 9406 Button Style, NO. 9685 Button Style, or NO. 9686 Button Style.  
(Specify NO. 9684 End Stop and NO. 9644 Master Carrier with Button Style Slides)

### 94008 SERIES

1. Furnish and install, as indicated on plans, Kirsch track NO. 94008, rolled of 22 gauge (.030") Galvanized Steel, White Baked Enamel Finish.
  2. Specify Slide Carrier: NO. 9670 Ball Bearing style, NO. 9687 Ball Bearing style, NO. 9673 Ball Bearing style or NO. 9678R Wheeled Style.  
(Specify NO. 9603 End Cap and NO. 94113-94114 Master Carrier with the above)  
Specify Slide Carrier: NO. 9406 or NO. Button Style, NO. 9685 Button Style, or NO. 9686 Button Style  
(Specify NO. 9684 End Stop and 9644 Master Carrier with Button Style Slides)
  3. Specify Mounting Bracket: NO. 94132 (Wall Mount) V (2"-3" Clearance) or NO. 94140 (Ceiling Mount).  
One Bracket to be mounted at each end of track. (One 24" from each drapery stacking end and one at 48" intervals over remainder of track).
- NOTE: Fastening devices should have a minimum 25lb. direct withdrawal strength. Screws used through channel openings should be a phillips or posidrive head with a NO. 6 head.

### 9046 SERIES

1. Furnish and install, as indicated on plans, Kirsch track NO. 9046, extruded of .070" 6063T5 Aluminum alloy etched and anodized.
2. Finish: (25) White
3. Specify Slide Carrier: NO. 9406 Button Style, NO. 9685 Button Style, or NO. 9686 Button Style.
4. Specify Master Carrier NO. 9644 OR 94158 AND 94159
5. Specify End Caps: NO. 9684 or NO. 9682